


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

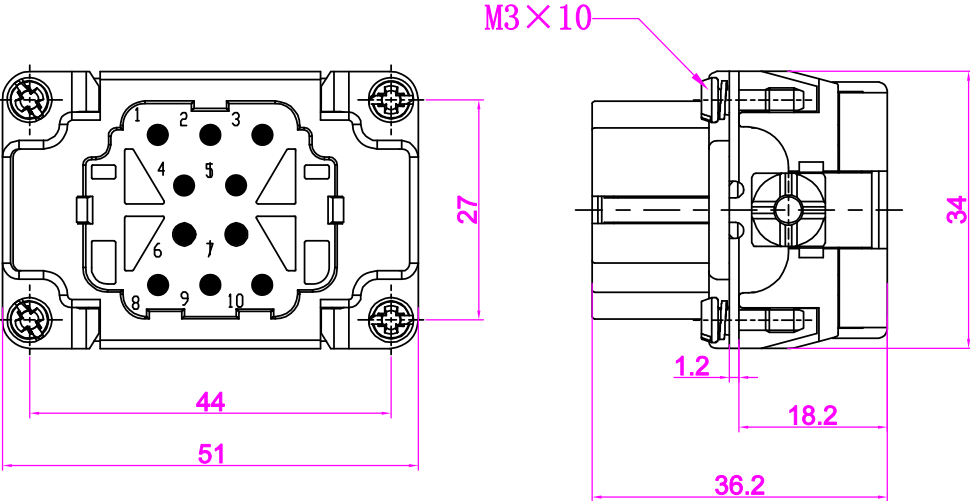


技术参数:
插芯:
插针数: 10+PE
额定电流: 16A
工作电压: 500V
额定脉冲电压: 6KV
污染等级: 3
依据UL/CSA的额定电压: 600V
绝缘阻抗: $\geq 10^{10}\Omega$
材料: 聚碳酸酯
温度范围: $-40^{\circ}\text{C}\sim +125^{\circ}\text{C}$
依据UL94的阻燃等级: V0
可插拔次数: ≥ 500


插针:
接线方式: 冷压连接
材料: 铜合金
表面处理: 镀银/镀金
接触电阻: $\leq 1\text{m}\Omega$
线径范围: $0.14\sim 4.0\text{mm}^2$ (AWG26-14)
剥线长度: 7.5mm

Specifications:
Inserts:
Number of contacts: 10+PE
Rated current: 16A
Rated voltage: 500V
Rated impulse voltage: 6KV
Pollution degree: 3
Rated voltage acc.to UL/CSA:600V
Insulation resistance: $\geq 10^{10}\Omega$
Material: Polycarbonate
Limiting temperatures: $-40^{\circ}\text{C}\sim +125^{\circ}\text{C}$
Flammability acc.to(UL94): V0
Mechanical working life -mating cycles: ≥ 500

Contacts:
Terminal: Crimp terminal
Material: Brass
Surfac: hard-silver plated/Gold plated
Contact resistance: $\leq 1\text{m}\Omega$
Crimp terminal
Wire gauge— mm^2 : $0.14\sim 4.0\text{mm}^2$
Wire gauge—AWG: 26-12
Stripping length:7.5mm

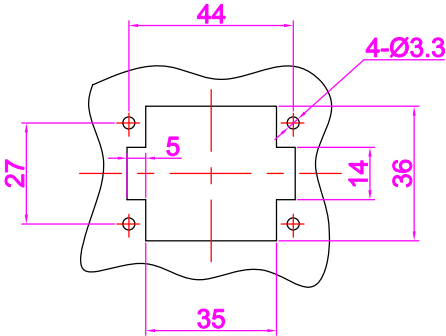

面板开孔图
Panel cut

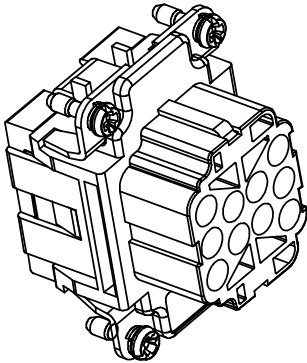

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.		
0~ ≤ 20	± 0.15	DRAW		Size	A4			
20~ ≤ 50	± 0.25	DESIGN		Scale		PART NAME: HZW-HEE-010-FC		
50~ ≤ 80	± 0.35	CHECK		Sheet		Drawing NO.		REV
80~ ≤ 120	± 0.50	APPROVE		Proj.		Material		A